



# PM-320


**Metal Frame 32" Panel / Chassis Mount LCD Display**  
**Protect Front Glass / IR Touch Screen (Options)**  
**450 cd/m<sup>2</sup> High Brightness**

## ❖ Specification

LCD Type	32" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1366x768 (HD)
Pixel Pitch	0.4845mm x 0.4845mm
Active Area	698.4x 392.85
Contrast Ratio	3000:1 (typ.)
Brightness	450 (cd/m <sup>2</sup> )
View Angle (H/V)	178 / 178
Response Time	6.5 ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240V
Power Consumption	80 watt (Max)
Operation Temperature	0° to 50°
Operation Humidity	90% (max)
Frame / VESA Mount	300 X 400 (option)
Weight	N.W 18.0 kgs / G.W 22 kgs
Dimension	mm



## ❖ Dimension

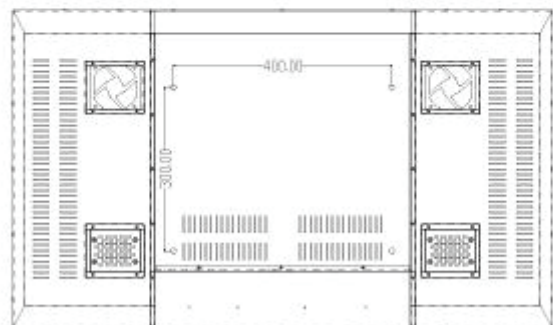

## ❖ Ordering Information

PM-320	32" Monitor Only
PMT-320I	32" Monitor + 32" IR Touchscreen
PMG-320	32" Monitor + Protect Front Glass

## ❖ Accessories

AC Power Cord , Power Cord , VGA Cable , USB Cable , Touch Driver