



PM-420

Metal Frame 42" Panel / Chassis Mount LCD Display

Protect Front Glass / IR Touch Screen (Options)


450 cd/m² High Brightness



❖ Specification

LCD Type	42" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1920X1080 (FHD)
Pixel Pitch	0.4845mm x 0.4845mm
Active Area	930.24 x 523.26
Contrast Ratio	4000:1 (typ.)
Brightness	450 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	6.5ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240V
Power Consumption	135 watt (Max)
Operation Temperature	0° to 50°
Operation Humidity	90% (max)
Frame / VESA Mount	300 X 400 (option)
Weight	N.W 18.5 kgs / G.W 22 kgs
Dimension	mm

❖ Dimension

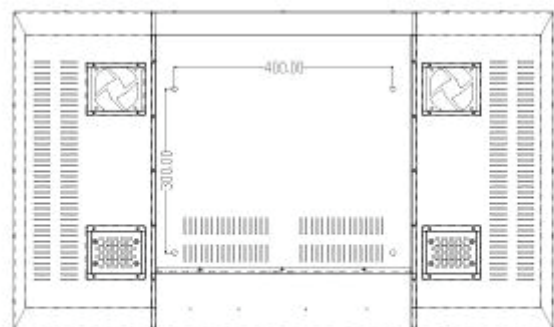

❖ Ordering Information

PM-420	42" Monitor Only
PMT-420I	42" Monitor + 42" IR Touchscreen
PMG-420	42" Monitor + Protect Front Glass

❖ Accessories

AC Power Cord , Power Cord , VGA Cable , USB Cable , Touch Driver