



OP-215


Metal Openframe Touch Screen Display
Low Consumption Power
Contrast Increase

❖ Specification


LCD Type	21.5" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1920x1080 (FHD)
Pixel Pitch	0.248mm x 0.248mm
Active Area	467.6 x 268.1
Contrast Ratio	1000:1 (typ.)
Brightness	250 (cd/m ²)
View Angle (H/V)	170 / 160
Response Time	5 ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	18 watt (Max) < 1 watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100
Weight	N.W kgs / G.W kgs
Dimension	519.6 x 320.2 x 43



❖ Dimension

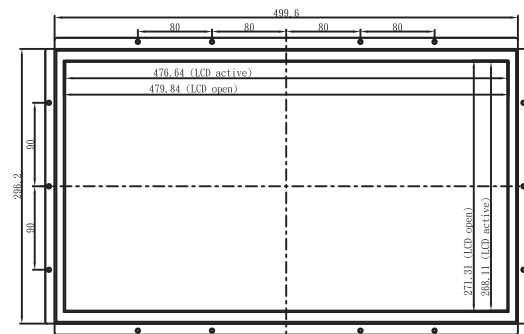

FRONT VIEW

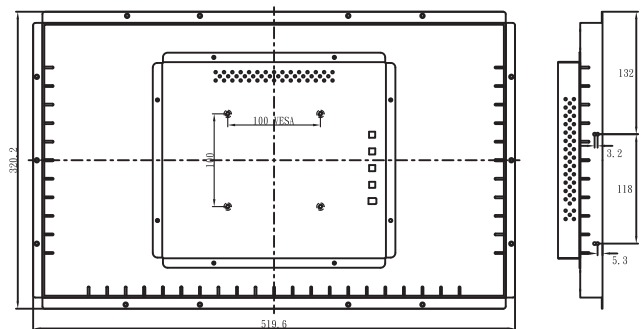

REAR VIEW



❖ Ordering Information

OP-215	21.5" Openframe Only
OPT-215R	21.5" Openframe + 5-W Resistive Touchscreen
OPT-215C	21.5" Openframe + Capacitive Touchscreen

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver