



OP-240


Metal Openframe Touch Screen Display
Low Consumption Power
Contrast Increase



❖ Specification

LCD Type	24" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1920X1080 (FHD)
Pixel Pitch	0.277mm x 0.277mm
Active Area	531.36 x 298.89 mm
Contrast Ratio	5000:1 (typ.)
Brightness	300 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	25 ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V / 24 V in (option)
Power Consumption	50watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 9.5kgs / G.W 10.6kgs
Dimension	499.6 x 299.2 x 55.5

❖ Dimension

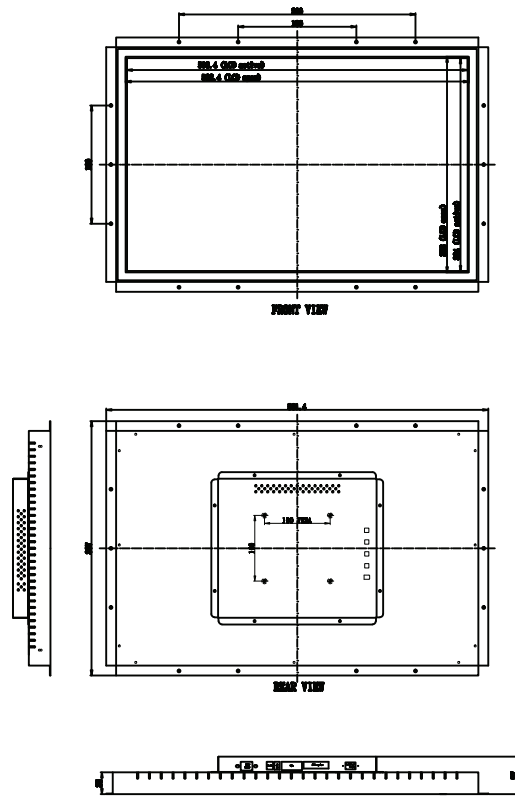

❖ Ordering Information

OP-240	24" Openframe Only
OPT-240R	24" Openframe + 5-W Resistive Touchscreen
OPT-240C	24" Openframe + Capacitive Touchscreen

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver

Contact Us

 **Macro Power**
 Macro Power Technology Co., Ltd
 (T) +886-3-327-1733 (F) +886-3-327-1723
 sales@macropower.com.tw