



# OP-121

**Metal Openframe Touch Screen Display**  
**Low Consumption Power**  
**Contrast Increase**

## ❖ Specification

LCD Type	12.1" Active Matrix , TFT
Aspect Ratio	4:3 Format
Resolution	800x600 (SVGA)
Pixel Pitch	0.3075mm x 0.3075mm
Active Area	246 x 184.5
Contrast Ratio	700:1 (typ.)
Brightness	450 (cd/m <sup>2</sup> )
View Angle (H/V)	160 / 140
Response Time	35ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	15 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 2.8kgs / G.W 3.9kgs
Dimension	347 x 298.6 x 47

## ❖ Ordering Information


OP-121	12.1" Openframe Only
OPT-121R	12.1" Openframe + 5-W Resistive Touchscreen
OPT-121C	12.1" Openframe + Capacitive Touchscreen

## ❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver



## ❖ Dimension

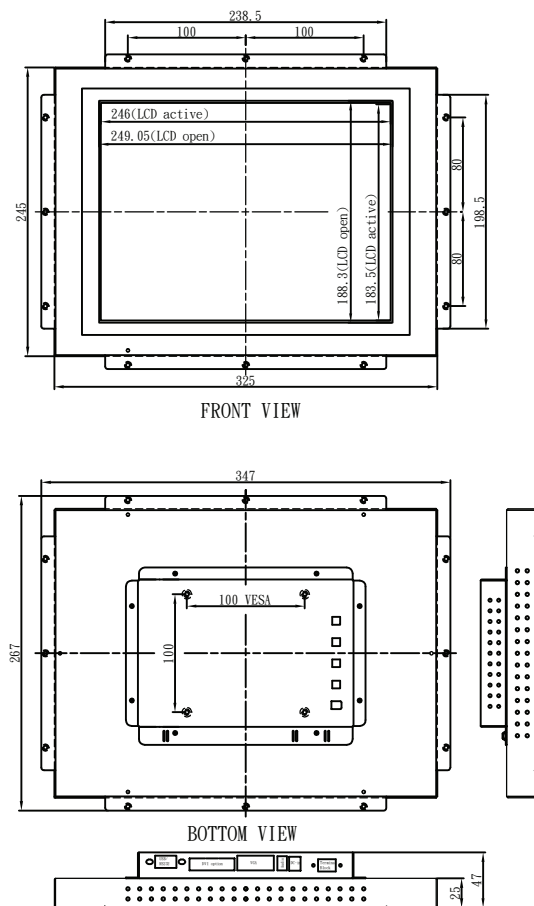

## Contact Us

**Macro Power**  
 Macro Power Technology Co., Ltd  
 (T) +886-3-327-1733 (F) +886-3-327-1723  
 sales@macropower.com.tw