



# OP-190




**Metal Openframe Touch Screen Display**  
**Industrial LCD Panel Use**  
**Low Consumption Power**

## ❖ Specification

LCD Type	19" Active Matrix , TFT
Aspect Ratio	4:3 Format
Resolution	1280x1024(SXGA)
Pixel Pitch	0.294mm x 0.294mm
Active Area	376.32 x301.06
Contrast Ratio	1000:1 (typ.)
Brightness	350 (cd/m <sup>2</sup> )
View Angle (H/V)	170 / 160
Response Time	5ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	28 watt (Max) < 1 watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	90% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 5.45kgs / G.W 6.5kgs
Dimension	490 x 380 x 53.9mm



## ❖ Dimension

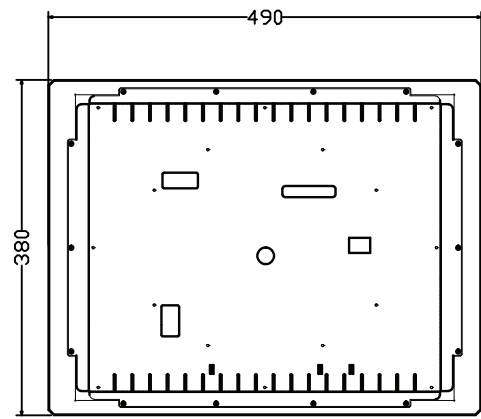

## ❖ Ordering Information

OP-190	19" Openframe Only
OPT-190R	19" Openframe + 5-W Resistive Touchscreen
OPT-190C	19" Openframe + Capacitive Touchscreen

## ❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver

### Contact Us

 **Macro Power**  
 Macro Power Technology Co., Ltd  
 (T) +886-3-327-1733 (F) +886-3-327-1723  
 sales@macropower.com.tw