

PM-260SB



Metal Openframe Touch Screen Display
 Low Power Consumption
 Super High Brightness 1000~1200 nits


❖ Specification

LCD Type	26" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1366x768 (HD)
Pixel Pitch	0.4215mm_x_0.4215mm
Active Area	575.76 x 323.71
Contrast Ratio	3000:1 (typ.)
Brightness	1000~1200 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	8ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240 V
Power Consumption	110 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W kgs / G.W kgs
Dimension	670 x 417 x 88 mm

❖ Accessories

Power Cord , VGA Cable , USB Cable , Touch Driver

❖ Dimension

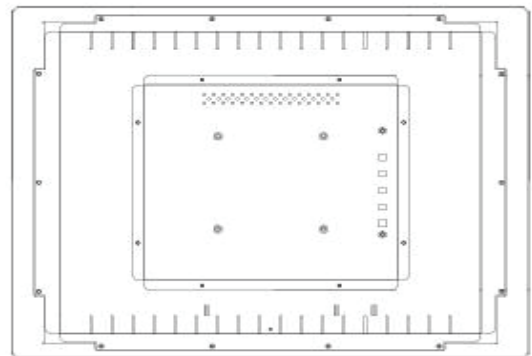

❖ Ordering Information

PM-260SB	26" Openframe Only
PMT-260SBI	26" Openframe + IR Touchscreen