

PM-315HD-SB




Metal Openframe Touch Screen Display
 Low Power Consumption
 Super High Brightness 1000~1200 nits

LCD Type	31.5" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1366x768 (HD)
Pixel Pitch	0.51mm x 0.51mm
Active Area	697.69 x 392.26
Contrast Ratio	3000:1 (typ.)
Brightness	1000~1200 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	6.5 ms (typ.)
Backlight Type	CCFL / LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240 V
Power Consumption	135 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W kgs / G.W kgs
Dimension	mm

❖ Accessories

AC Power Cord , VGA Cable , USB Cable , Touch Driver

❖ Dimension

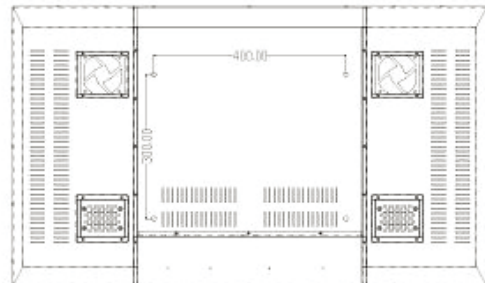

❖ Ordering Information

PM-315HD-SB	31.5" Monitor Only
PMT-315HD-SBI	31.5" Monitor + IR Touchscreen
PMG-315HD-SB	31.5" Monitor + Capacitive Touchscreen