


# OP-220SB



Metal Openframe Touch Screen Display  
 Low Power Consumption  
 Super High Brightness 1000~1200 nits



## ❖ Specification

LCD Type	22" Active Matrix , TFT
Aspect Ratio	16:10 Format
Resolution	1680X1050 (WSXGA+)
Pixel Pitch	0.282mm x 0.282mm
Active Area	473.8 x 296.1
Contrast Ratio	2000:1 (typ.)
Brightness	1000~1200 (cd/m <sup>2</sup> )
View Angle (H/V)	178 / 178
Response Time	8ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 / 24 V Adapter
Power Consumption	65 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 6.3kgs / G.W 7.2kgs
Dimension	499.6 x 299.2 x 55.5mm

## ❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver

## ❖ Dimension

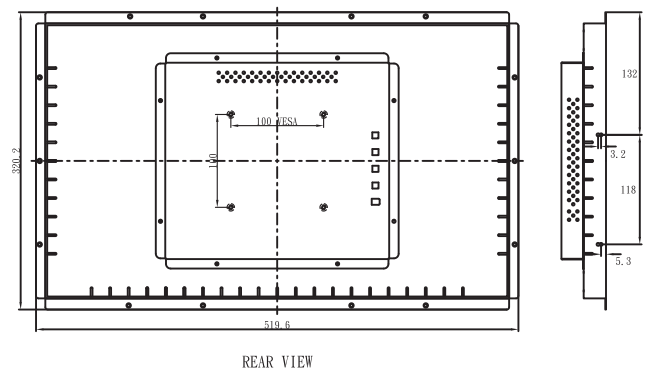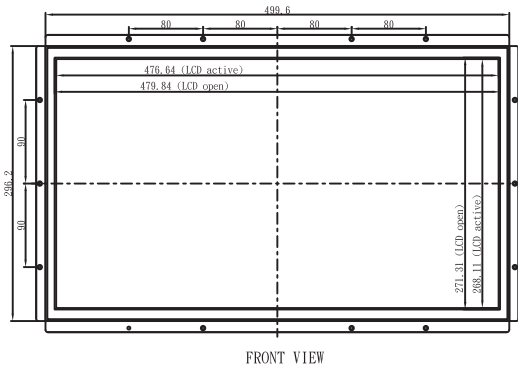

## ❖ Ordering Information

OP-220SB	22" Openframe Only
OPT-220SBR	22" Openframe + 5-W Resistive Touchscreen
OPT-220SBC	22" Openframe + Capacitive Touchscreen