

PM-084HB



Metal Openframe Touch Screen Display
 Low Power Consumption
 High Brightness Panel Use


❖ Specification

LCD Type	8.4" Active Matrix , TFT
Aspect Ratio	4:3 Format
Resolution	800x600 (SVGA)
Pixel Pitch	0.231mm x 0.231mm
Active Area	170.4 x 127.8
Contrast Ratio	600:1 (typ.)
Brightness	450 (cd/m ²)
View Angle (H/V)	160 / 140
Response Time	35ms. (typ.)
Backlight Type	LED Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	DC 12 V Adapter
Power Consumption	8 watt (Max) < 1watt (Stand By Mode)
Operation Temperature	0° to 50°
Operation Humidity	80% (max)
Frame / VESA Mount	VESA 100 x 100 (Standard) / 75 x 75 (Option)
Weight	N.W 2.2kgs / G.W 3.2kgs
Dimension	250.2 x 190.2 x 46.98

❖ Accessories

12V DC Adapter , Power Cord , VGA Cable , USB Cable , Touch Driver

❖ Dimension

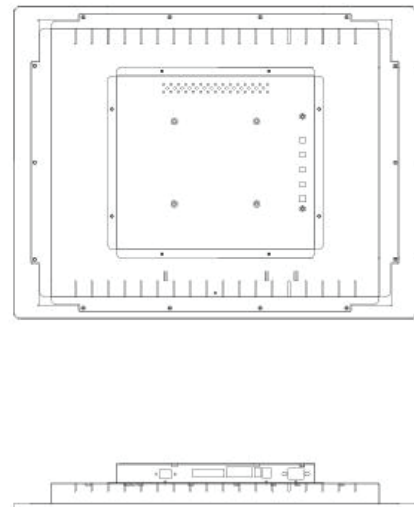

❖ Ordering Information

PM-084HB	8.4" Monitor Only
PMT-084HBR	8.4" Monitor + 5-W Resistive Touchscreen
PMT-084HBC	8.4" Monitor + Capacitive Touchscreen