



OP-320



Metal Openframe Screen Display
Elegance Housing Design
Optional Protect Front Glass Use

❖ Specification

LCD Type	32" Active Matrix , TFT
Aspect Ratio	16:9 Format
Resolution	1366X768(HD)
Pixel Pitch	0.4845mm x 0.4845mm
Active Area	698.4x 392.85 mm
Contrast Ratio	3000:1 (typ.)
Brightness	450 (cd/m ²)
View Angle (H/V)	178 / 178
Response Time	6.5ms. (typ.)
Backlight Type	CCFL Backlight
Input Signal	VGA / DVI-D (option)
Plug & Play (pnp.)	VESA DDC 2B
Display Control	Display On / Off , Adjustment , OSD Control
Power Input	AC 110~240V
Power Consumption	80 watt (Max)
Operation Temperature	0° to 50°
Operation Humidity	90% (max)
Frame / VESA Mount	300 X 400 (option)
Weight	N.W 18.0 kgs / G.W 22 kgs
Dimension	804 x 494.3 x 91



❖ Dimension

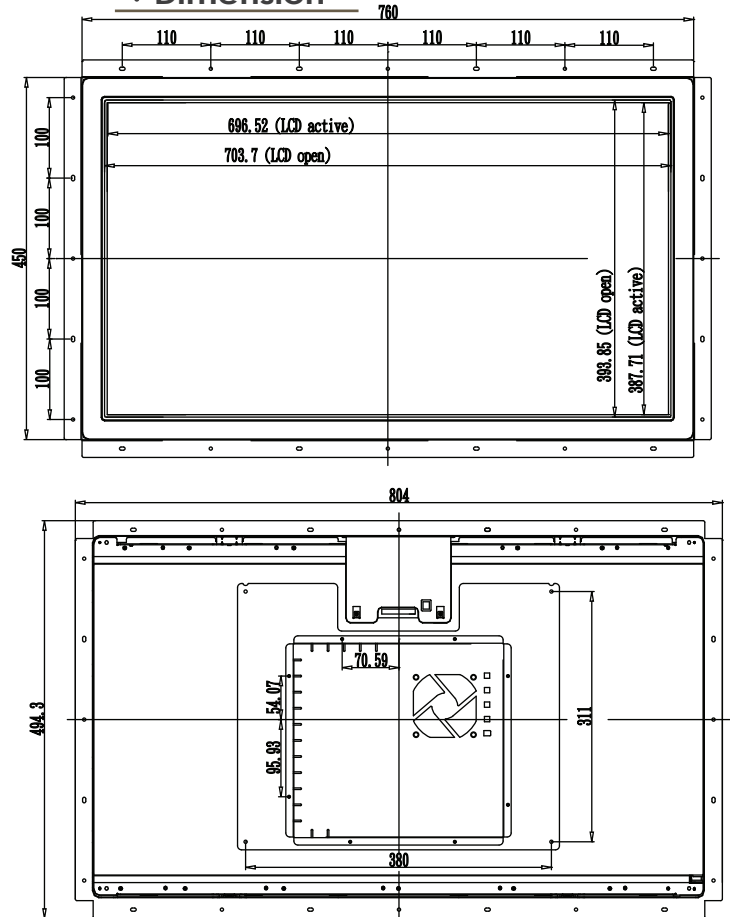

❖ Ordering Information

OP-320	32" Openframe Only
OPT-320I	32" Openframe + 32" IR Touchscreen
OPG-320	32" Openframe + Protect Front Glass

❖ Accessories

AC Power Cord , Power Cord , VGA Cable , USB Cable , Touch Driver